

# ANALYTIC SYSTEMS

Power Conversion Solutions

#207 12448 82nd Ave.  
Surrey, BC V3W 3E9 CANADA

+1 (604) 543-7378 · phone  
1-800-668-3884 · toll free  
+1 (604) 543-7354 · fax

[www.analyticsystems.com](http://www.analyticsystems.com)



## Benefits

- Ultra-Quiet
- Power sensitive electronics without interference
- Rugged & Reliable
- Ensure years of safe and trouble free operation

## Applications

- Marine & other rugged environments
- Electric Utilities and Substations
- Manufacturing Plants
- Steel Mills
- Military Applications (COTS)
- Industrial Controls
- OEM Applications
- Solar / Alternative Power Systems
- Fuel Cells

## DC/DC Voltage Converters

### VTC310 Isolated Series Voltage Converter

### Description

The model VTC310 Voltage Converter supplies 12V, 24V or 48 VDC from a 110V, 220V or 300 VDC power source. Other output voltages up to 72 volts are also available by special order.

The all-new Current Mode switching design offers increased power and reliability in a compact package. Extra input and output filtering reduce EMI to extremely low levels. Reliability features include an input fuse, thermal shutdown, current limiting and short circuit shutdown with automatic recovery.

The output voltage is easily adjusted 0.5 volts above or below the standard output voltage to accommodate special requirements.


Available options include a Remote Control and/or a Digital Volt Ammeter.

### Features


- Fully Isolated Design
- Adjustable output voltage
- Audible & visual indicators for constant current, low input voltage, low output voltage & over-temperature
- Over-temperature shutdown
- Short circuit protection
- Output overvoltage crowbar
- Cycle by cycle current limiting
- Reverse input protection
- Transient Voltage Suppression
- Ultra-quiet low EMI operation
- Dry contact output fail relay
- Custom input / output voltages from 8 to 360 VDC
- Remote control option
- Digital Volt/Ammeter option
- Wide Temperature operation Available
- Conformal Coating and/or Harsh Environment Ruggedization Available

# VTC310 Isolated Series Voltage Converters

## Mechanical Diagrams

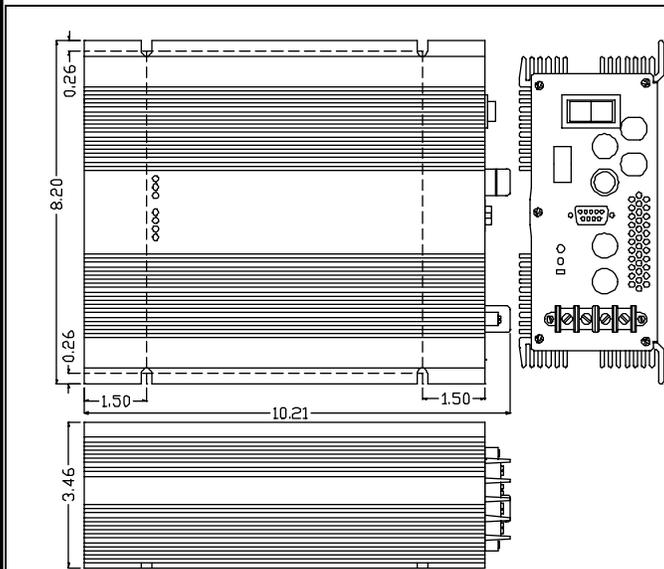

Shown without Digital Meter

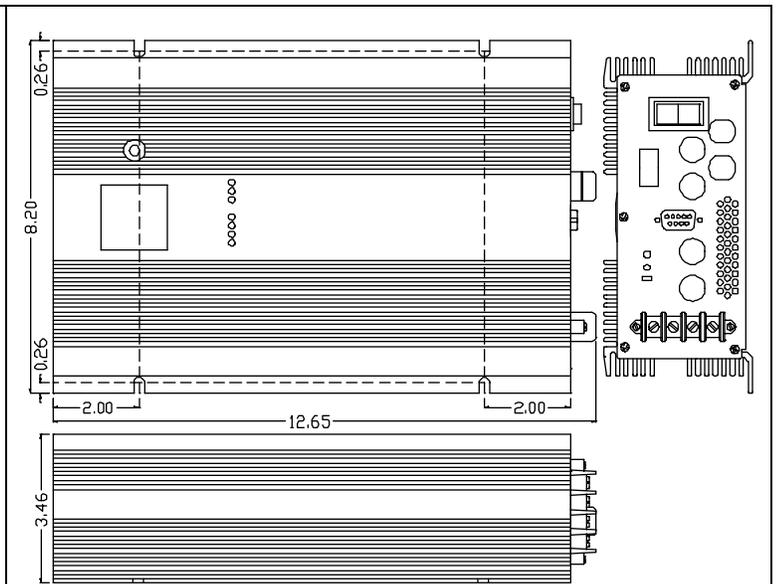

Shown with Digital Meter

## Specifications

### Electrical (Input)

<b>Nominal (ip)</b>	110	250	300
<b>Actual (Vdc)</b>	100-140	230-280	280-360
<b>Input Amps (max)</b>	4.8	2.1	1.5
<b>Input Fuse (MDA)</b>	4	3	2
<b>Noise on Input</b>	< 25 mV		

### Environmental Specifications

<b>Operating Temp. Range</b>	-25° to +40°C @ maximum output Derate Linearly 2.5% per °C from 40°C (Optional -40°C extra wide temp. operation avail.)
<b>Humidity</b>	0 - 95°C Relative Humidity (non-condensing) with optional conformal coating
<b>Audible Noise</b>	NONE Ødb @ 3 ft
<b>Typical Service Life</b>	> 10 yrs. (87,600 hrs)
<b>Isolation</b>	Input-Case & Input-Output 1500VDC Output-Case 500VDC

### Electrical (Output)

<b>Output Nominal (op)</b>	12	24	48
<b>Output Volts (DC)</b>	13.6 ± 0.05	27.2 ± 0.05	54.4 ± 0.05
<b>Output Amps</b>	20 cont. / 25 peak	10 cont. / 13 peak	5.0 cont. / 6.5 peak
<b>Output Crowbar</b>	16.0 ± 0.5V	32.0 ± 1.0V	63.9 ± 2.0V
<b>Output Ad justment</b>	± 0.5		
<b>Output Ripple &amp; Noise</b>	< 25 mV		
<b>Transient Response</b>	< 1V for 50% Surge		
<b>Regulation (Line &amp; Load)</b>	< +/- 0.5%		
<b>Duty Cycle</b>	Peak 20% for 10 min max Continuous 100% for 24 hours per day		
<b>Efficiency</b>	> 80% @ Maximum Output		

### Mechanical Specifications

<b>Length</b>	9.6 in / 24.4 cm
<b>Width</b>	8.2 in / 20.8 cm
<b>Height</b>	3.5 in / 6.4 cm
<b>Clearance</b>	1 inch (2.5 cm) all around
<b>Material</b>	Marine Grade Aluminium
<b>Finish</b>	Black Anodize / Powder Epoxy Coat
<b>Fastenings</b>	All 18-8 Stainless Steel
<b>Weight</b>	7.5 lb / 3.4 kg
<b>Connections</b>	Four contact output terminal
<b>Warranty</b>	3 years
<b>Safety</b>	Approval to cE TLus standards pending

Available From:



**ANALYTIC SYSTEMS**

Quality since 1976

#207 12448 82<sup>nd</sup> Ave.  
Surrey, BC V3W 3E9 CANADA  
+1 (604) 543-7378 • phone  
1-800-668-3884 • toll free  
+1-604-543-7354 • fax  
[www.analyticssystem.com](http://www.analyticssystem.com)